



DRUM REPLACER

Software User Manual

Software Version 1.1
EN 201014

End User License Agreement (EULA)

Do not use this product until the following license agreement is understood and accepted. By using this product, or allowing anyone else to do so, you are accepting this agreement.

This End-User License Agreement (EULA) represents the contractual conditions between you, the Licensee, and UVI, located 159 rue Amelot, 75011 Paris - France for the use of software, documentation and other materials created by UVI.

You should not register, install or use UVI Products until the following license agreement is understood and accepted.

By using UVI Products, or allowing anyone else to do so, you are accepting this agreement.

A- License Grant

1. UVI grants to you, subject to the following terms and conditions, the non-exclusive right to use each authorized copy of the Product.
2. UVI Product license are granted only to a single user. You may use this product on up to three separate computers or iLok Dongles, which shall be owned and used by you exclusively.
3. Renting or lending the licensed Software to a third party is expressly forbidden.
4. Except if otherwise stated within this EULA, Licensee may resell the software to a third party or transfer the software permanently. Request may be done using the 'Transfer License' feature in your iLok account, subject to a \$25 fee per-license (\$50 maximum) by Pace. The serial number of the Product will be transferred to the third party by UVI, and Licensee's original registration will be deleted.
5. Resale or ownership transfer of individual products obtained in a bundle, or those used to upgrade or cross-grade to other products are not allowed.
6. UVI allows you to use any of the sounds and samples in the products you've purchased for commercial recordings without paying any additional license fees or providing source attribution to UVI.
7. This license expressly forbids resale or other distribution of the sounds and software included in the Product or their derivatives, either as they exist on disc, reformatted for use in another digital sampler, or mixed, combined, filtered, resynthesized or otherwise edited, for use as sounds, multi-sounds, samples, multi-samples, wavetables, programs or patches in a sampler, microchip or any hardware or software sample playback device. You cannot sell the Product content or give it away for use by others in their sampling or sample playback devices.
8. In the event UVI terminates this agreement due to your breach, you agree to return the original and all other copies of the software and documentation to UVI.
9. UVI reserves all rights not expressly granted to herein.

B- License Activation

1. In order to use UVI Products it is required that you authorize them by registering your Serial Number on uvi.net/register, have a free iLok account (not necessarily a dongle) and install the free iLok License Manager (done automatically by UVI Workstation and Falcon installers). It is impossible to use UVI Products if they are not registered and authorized.
2. During authorization you will need to enter your name, email address and postal address which will be stored in the UVI database. UVI uses a secure SSL connection with 128-bit-encryption that meets current security standards to transmit your data over the web. For further information about UVI's handling of personal data please see: <https://www.uvi.net/privacy-policy>
3. The UVI Product license allows up to 3 simultaneous activations on any combination of iLok dongles and computers. Activations can be moved between devices at anytime through the iLok License Manager.

C- Protection of Software

You agree to take all reasonable steps to protect the Product and any accompanying documentation from unauthorized copying or use. You agree not to modify the Product to circumvent any method or means adopted or implemented by UVI to protect against or discourage the unlicensed use or copying of the Product.

D- Ownership

Ownership of, and title to, the enclosed digitally recorded sounds (including any copies) are held by UVI. Copies are provided to you only to enable you to exercise your rights under the license.

E- Term

This agreement is effective from the date you open this package, and will remain in full force until termination. This agreement will terminate if you break any of the terms or conditions of this agreement. Upon termination you agree to return to UVI all copies of this product and accompanying documentation and destroy any other copies made.

F- Restrictions

Except as expressly authorized in this agreement, you may not rent, lease, sub-license, distribute, copy, reproduce, display, modify or timeshare the enclosed Product or documentation.

G- NFR Serials and Free Products

UVI Products serial numbers labeled as "NFR" (Not For Resale) shall only be used for demonstration, testing and evaluation purposes. NFR Products may not be used for commercial purposes, and may not be resold or transferred. They are not eligible for license recovery and are exempt from update, upgrade or crossgrade offers, and cannot be purchased with or exchanged for vouchers. Furthermore, as an owner of an NFR Product, you are not entitled to promotions available for the commercial version of the Product.

H- No Support Obligation

UVI will make its best effort to support you in the event of technical difficulty with a UVI Product. However, UVI is not obligated to furnish or make available to you any additional information, software, technical information, know-how, or support.

I- Specifications and System Requirements

All technical specifications of UVI Products provided are intended to be estimates or approximations. Due to numerous variables no guarantees of compatibility or performance can be made. All such specifications shall be in writing. End-User is solely responsible for, prior to purchase, ensuring that End-User's devices are compatible and meet the system requirements for UVI Products, and that the applicable UVI Products meet End-User's requirements.


This EULA is governed by the laws of France.

©2020 UVI. All rights reserved.
All trademarks are the property of their respective owners.

Table of Contents

Introduction	4
System Requirements.....	5
GUI	
Overview.....	6
Detection and Separation.....	7
Browser	8
Sample Part.....	9
Plugin Part	10
Mixer	11
MIDI Record.....	12
Preferences.....	13
Links.....	14
Credits and Thanks	15

Introduction

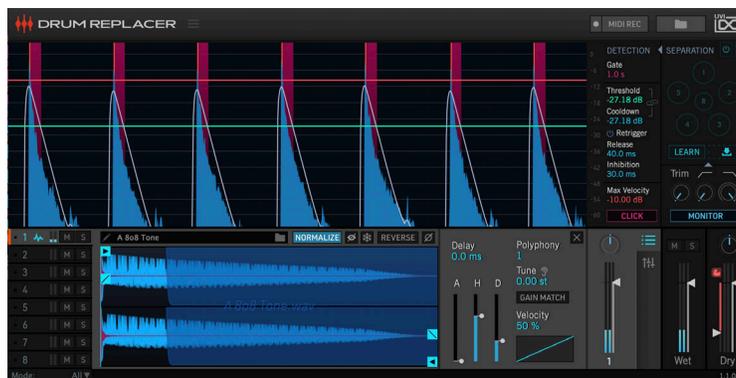

DRUM REPLACER INTELLIGENT DRUM TRIGGERING

OVERVIEW

Drum Replacer is a realtime, program-adaptive, drum replacement and processing utility, providing effortless audio component separation and triggering with a sophisticated feature set and elegant workflow. With Drum Replacer you can easily remove bleed from drum recordings, replace drums in a mix with your favorite samples or VSTi, add sub-bass, layer existing drum sounds, and more.

WORKFLOW

Utilizing machine learning-based analysis with realtime separation, Drum Replacer will examine and intelligently parse an incoming audio signal into discrete components. Selected elements are then fed into a detection circuit to trigger up to 8 internally-hosted audio samples or virtual instruments simultaneously, sequentially, or randomly.

EASE OF USE

Drum Replacer was designed to provide users a sophisticated end result with minimal effort. Analysis, detection, and track customization can all be done with only a few clicks, making it easy to master and implement throughout your projects; integrated browsers with favorites combined with comprehensive preset support for all or individual tracks help make the most of your time.

MACHINE LEARNING

Drum Replacer works uniquely by using machine learning to create spectral models for each discrete sound it detects during analysis. This allows it to produce very accurate component isolation - with gain and velocity tracking - in realtime, opening up many new avenues for processing in mixing and remixing environments.

ANALYSIS

Analysis can be made at any time to the incoming audio signal by clicking 'LEARN', or from any audio file by way of drag-and-drop. Once analysis is complete, components are split and ordered numerically by overall energy level (numbered 1-5, greatest to least) with a remainder component designated as [R]. Components will flash within the UI as they're triggered, making them easy to identify on-the-fly. They can be individually muted, and their sum can be further processed by way of trim, low-pass and high-pass filters, before being sent through to the outputs or into the detection engine.

TRIGGERING

Triggering is managed with the large central analyzer, and control panel immediately to its right. Prior to analysis this display shows the aggregate input signal, but once an analysis has been made it displays only the currently selected components - allowing you to easily focus on and fine-tune triggering to specific elements in a mix.

DETECTION

Configuring detection is straight-forward; set the Threshold (green line) so that it's triggered by the initial attack, and adjust the Cooldown (blue line) to prevent unwanted retriggering. Gate duration can be manually set in milliseconds, and note velocity range by way of Max Velocity (red line).

Detection creates a note trigger sent internally to all 8 tracks in Drum Replacer. Initially, changes to detection settings will be inaudible (until you've loaded a sample or VSTi), but enabling 'CLICK' will output a placeholder sound to help while you dial-in the desired response.

8 LAYERS

Drum Replacer comes with 8 tracks that can be loaded with either audio samples or your own virtual instruments. A built-in browser helps you to easily find local sounds and plugins (conveniently organized by maker). For quick access to your preferred samples and plugins, simply toggle the 'Star' icon to add them as favorites.

SAMPLE AND VSTI HOSTING

Both sample and instrument tracks provide basic mixing controls (level, pan, and lp/hp filter), velocity, and custom track naming. In addition each track has a configurable delay offset that allows you to adjust timing positively or negatively, making it easy to achieve perfect sync with the audio source or even pre-trigger your sounds and instruments.

Sample tracks provide an interactive waveform display with adjustable start and end time, sample reverse, phase invert, polyphony, an AHD amplitude envelope, gain matching, +/-48 semitone tune control, while offline pitch matching helps you achieve accurate blending and phase correlation with the source material. Instrument tracks provide access to your plugins' full GUI editors, along with MIDI channel and note selection.

AND MORE

Drum Replacer has extended track triggering options including all, sequential, and random, allowing for dynamic performances by alternating between different user samples and instruments. And to make the most of your time, Drum Replacer has verbose preset support, allowing you to template entire 8-track configurations, or individual tracks that you'd like to reuse in the future.

System Requirements



Compatibility

Audio Units, VST, or AAX

Tested and Certified in :

Digital Performer 8+, Pro Tools 11+, Logic 9+, Cubase 7+, Nuendo 6+, Ableton Live 8+, Studio One 2+, Garage Band 6, Maschine 1 & 2, Traktion 4+, Vienna Ensemble 5, Reaper 4+, Main Stage 3, FL Studio, BitWig, Reason 9.5, MuLab 5.5+

Minimum System Requirements

- ▶ Mac OS X 10.9 or higher (64-bit)
- ▶ Mac Intel Processor supporting the AVX instruction set (Intel Core i3, i5, i7, i9: SandyBridge, IvyBridge, Haswell, Broadwell, Skylake,...), 4 GB RAM



Compatibility

VST or AAX

Tested and Certified in :

Digital Performer 8+, Pro Tools 11+, Cubase 7+, Nuendo 6+, Ableton Live 8+, Studio One 2+, Sonar X3+, Maschine 1 & 2, Traktion 4+, Vienna Ensemble 5, Reaper 4+, Sonar X3, FL Studio, BitWig, Reason 9.5, MuLab 5.5+

Minimum System Requirements

- ▶ Windows 8 or higher (64-bit)
- ▶ Intel Processor supporting the AVX instruction set (Intel Core i3, i5, i7, i9: SandyBridge, IvyBridge, Haswell, Broadwell, Skylake,...), 4 GB RAM

Flexible Authorization With iLok



All UVI licenses allow up to 3 concurrent activations on any combination of computer hard drives or iLok USB keys, easily managed through the iLok License Manager (iLok account required).

Interface - Overview



1 ► Main Menu

- » **Load/Save Preset**
Manage global snapshots of all settings
- » **Load/Save Preset Slot [1-8]**
Manage snapshots of individual tracks
- » **Clear All Slots**
Initialize all tracks
- » **Settings**
> See [page 13](#) for detail

2 ► Browser Toggle

- Click to open the built-in browser panel
> See [page 8](#) for detail

3 ► Central Analyzer

- Shows incoming signals in realtime, or loaded source audio, in learn mode.
- Shows trigger outputs and detection settings in playback mode
- » **Green line** = Threshold level
- » **Blue line** = Cooldown level
- » **Magenta block** = Gate detection
- » **Red line** = Max Velocity

4 ► MIDI Recording

- Record and export trigger outputs as MIDI file
> See [page 12](#) for detail

5 ► Detection

- Trigger detection settings
> See [next page](#) for detail

6 ► Separation

- Audio component analysis, separation, muting and activity HUD
> See [next page](#) for detail

7 ► Part Slots

- Up to 8 track parts for hosting user samples or VSTi plugins

8 ► Trigger Mode

- All:** Trigger the tracks at once
- Sequence:** Trigger the tracks sequentially
- Random:** Trigger the tracks randomly
- Velocity:** Activates tracks based on detected trigger velocity, where the velocity range [1-127] is divided by the number of tracks configured, and allocated to them sequentially from lowest to highest.
For example, with tracks 1, 3, and 5 configured (3 tracks total), velocity will be divided by 3, into ranges of 1-42, 43-85, and 86-127. In this case, a detected trigger within the first range [1-42] will activate track 1, a trigger within the second range [43-85] will activate track 3, and so on.
With only 1 track configured all trigger detections will activate that track.

9 ► Part Settings

- Settings of the selected part
> See [page 9](#) and [10](#) for detail

10 ► Edit/Mixer View

- Click to toggle between Part Edit, and Mixer views
> See [page 10](#) and [11](#) for detail


11 ► Outputs

- » **Wet**
Set the output level, mute and solo of the Part Mixer
- » **Dry**
Pan: set the pan position of the dry signal
Duck: enable/disable ducking, ducks the dry signal level for every trigger event, envelope mode and times can be configured in Preferences
> See [page 13](#) for detail
Duck Amount [slider]: set the gain reduction amount
Dry Level: set the dry signal level

12 ► Tool Tips

- Display instructions for any parameter by hovering over it with your mouse

Interface - Detection and Separation

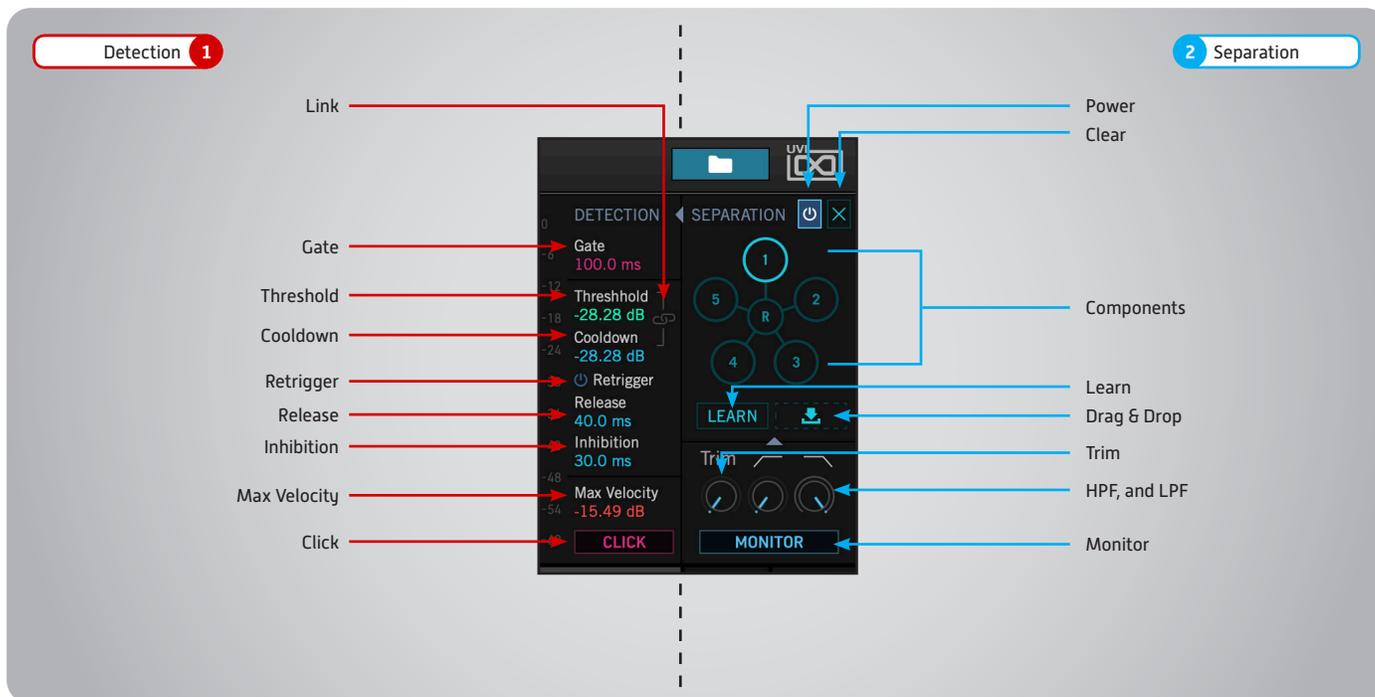

1 ► Detection

Trigger detection settings

- » **Gate:**
Transient gate processor time
- » **Threshold**
Sets the gate onset detection threshold
A trigger event can happen only if the RMS level is above the threshold. The setting is indicated in green line in the Central Analyzer
- » **Cooldown**
Set the cool-down threshold, takes effect after a detection, it prevents any further detection until signal has reduced to below cool-down threshold
The setting will indicate as blue line in the Central Analyzer
- » **Link:** Link the Threshold and Cooldown level
- » **Retrigger**
Allows multiple trigger events to happen while the envelope is above the detection threshold (cooldown is then disabled). This is useful for drum rolls or very fast sequences, but can also detect too much events so use it with care

One can increase the release control to smooth unwanted envelope ripples, or on the contrary lower the release to be more reactive

- » **Release**
Set the RMS envelope release time
- » **Inhibition**
Sets the minimum time between two trigger events
- » **Max Velocity**
Sets the reference RMS level that corresponds to maximum MIDI velocity 127 (MIDI)
- » **Click**
Output a placeholder sound to help while setting the desired response

2 ► Separation

Settings of the Separation of the incoming signal or loaded audio file

- » **Power**
Enables separation functions
- » **Clear [X]**
Clear the analysis model

» Components

1~5: Components splits by analysis, ordered numerically by overall energy level (numbered 1-5, greatest to least)
R: Remainder component
Components will flash within the UI as they're triggered

» Learn

Click to enable analysis of the incoming signals, can be committed, paused or cancel while learning

» Drag & Drop

Drag an audio file from your DAW or desktop to use for analysis

» Trim

Trim increase signal level if input signal is too low


» High-Pass and Low-Pass Filters

Improve detection by removing unwanted frequencies

» Monitor

Solo the output of the detection stage. Useful to isolate drum components, tune the transient gate time

Interface - Browse/Load Samples or Plugins

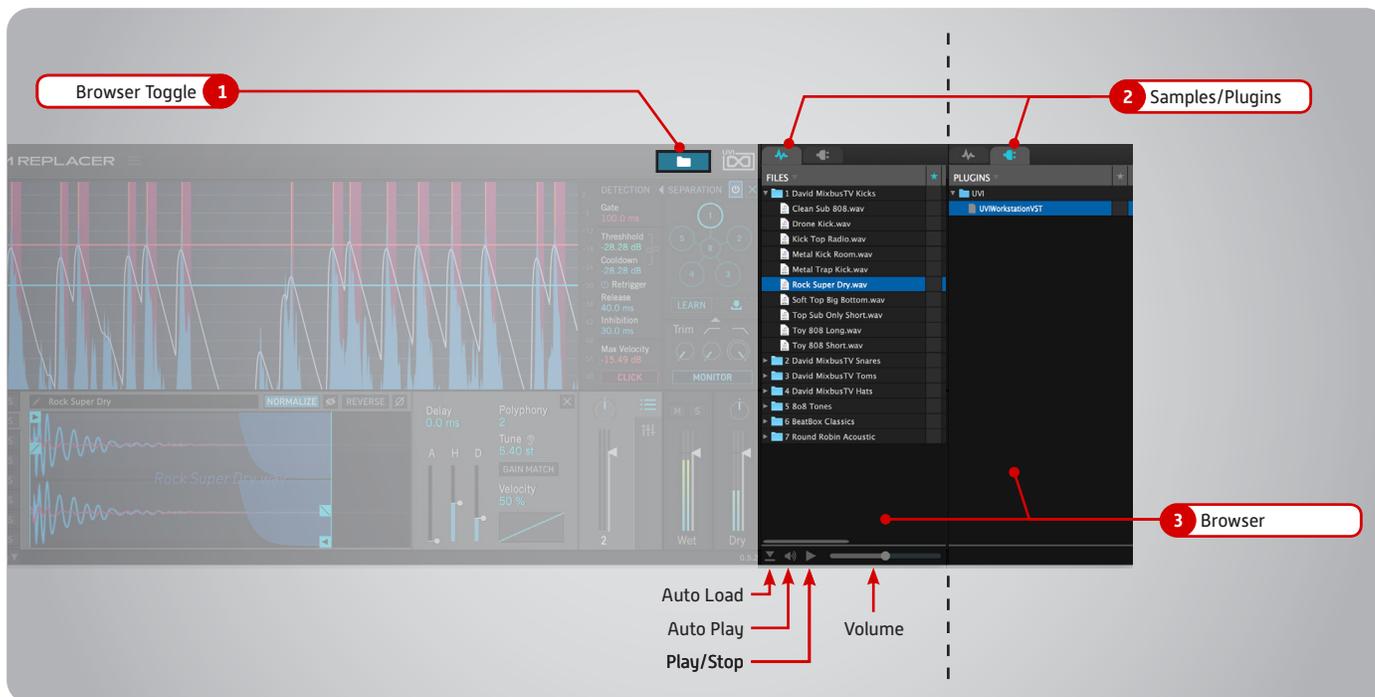

1 ► Browser Toggle

Click to open the built-in browser panel

2 ► Samples/Plugins Tab

Click the tab to show local samples or hosted VSTi plugins

3 ► Browser

Files and Plugins are organized into folders, and can be nested as many levels as needed

To click the Star icon to tag the sample or plugin as favorite

The Sample File browser also has some options at the bottom of the interface for quickly auditioning samples and adding them to a program.

» Auto Load

Loads samples automatically on selection. This is especially useful when you have already mapped, but would like to replace the sample file.

» Auto Play

Auditions samples upon selection

» Play/Stop

Start and stop sample playback manually


» Volume Slider

Sets the playback level

To load a sample or plugin from the Browser, drag and drop the item to the desired part.

Samples can also be drag & dropped directly on parts from the desktop or media browser of some DAWs

Interface - Sample Part

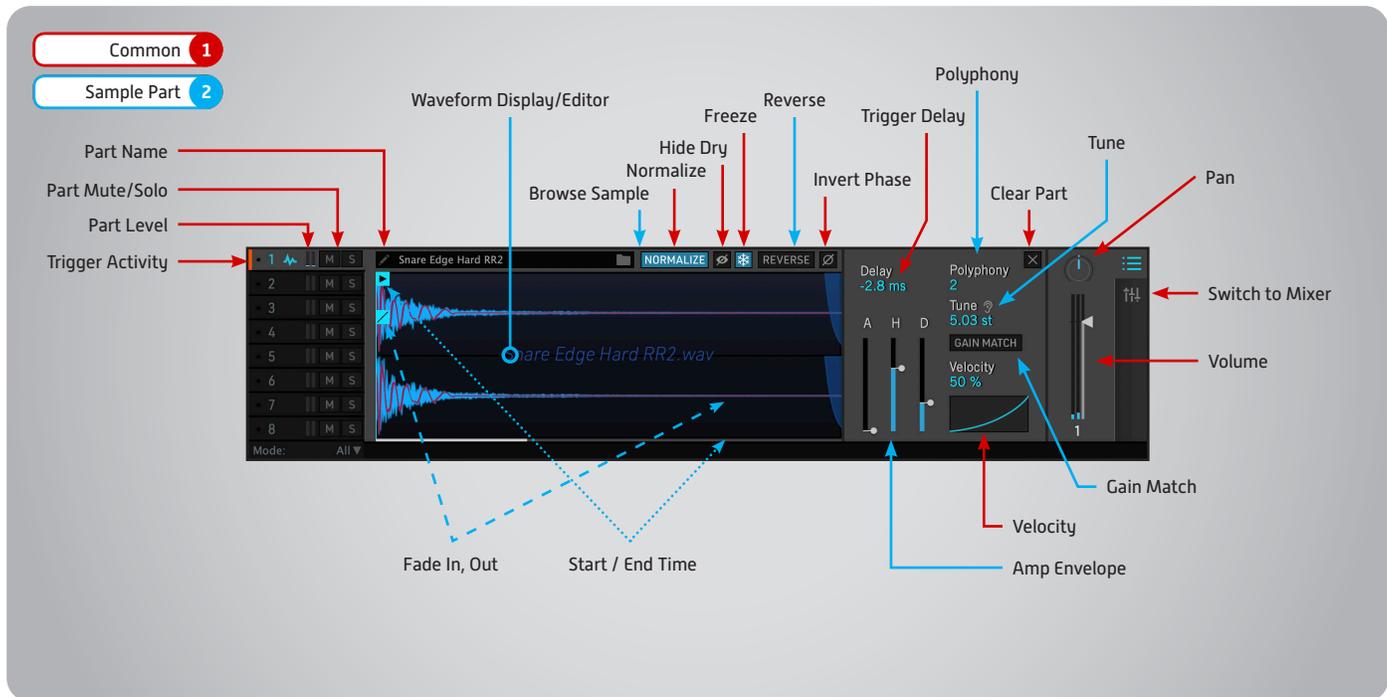

1 Common Part Controls

Parameters common all part types

- » **Trigger Activity**
Lights blink when the part is triggered
Click here to trigger manually the sample/plugin
- » **Part Level**
Indicates the part output level
- » **Part Mute / Solo**
Click to mute or solo the part
- » **Part Name**
Display the part name
Click the pencil icon to rename the part
- » **Normalize**
Normalizes the display of the dry signal in the waveview (for easier matching)
- » **Hide Dry Level**
Click to hide the source level (red)
- » **Freeze**
Freeze the display of the dry signal in the waveview (for easier matching)
- » **Invert Phase [Ø]**
Click to invert the phase of the outputs
- » **Clear [X]**
Clear the part
- » **Pan**
Set the stereo pan position of the part

» Volume

Set the output level of the part»

Trigger Delay

Offset the trigger timing positively, or negatively

» Velocity

Percentage of part level to be dynamically controlled by trigger velocity
Velocity Curve: Response curve of trigger velocity (soft, linear, hard)

2 Sample Part

Parameters specific to Sample parts

- » **Browse Sample**
Open the browser to the sample location
- » **Waveform Display Editor**
Displays the Part (blue), and the Source (red), in realtime
Start Time: Click-drag the left line to set the sample start
End Time: Click-drag the right line to set the sample end
Fade In: Shift-click-drag the left line to set the sample fade in
Fade Out: Shift-click-drag the right line to set the sample fade out
Zoom: Command-mouse wheel to zoom the display in/out

» Reverse

Click to reverse the sample

» Amplitude Envelope [AHD]

3-stage (Attack, Hold, Decay) envelope editor to shape the amplitude

» Polyphony

Set the polyphony of the part
Shift-drag to set the all sample parts at once

» Tune


Click the 'Ear' icon to start pitch matching with source component or manually set the pitch at numeric field (+/- 48 semitones)

» Gain Match


Click to set the trigger volume match the volume of the detected sound

» Drag and Drop Option

If you DnD a sample which have more 2 channels, the option will appears, allows to select only some channels of the sample and/or assign those to different tracks

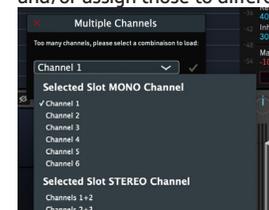

Interface - Plugin Part

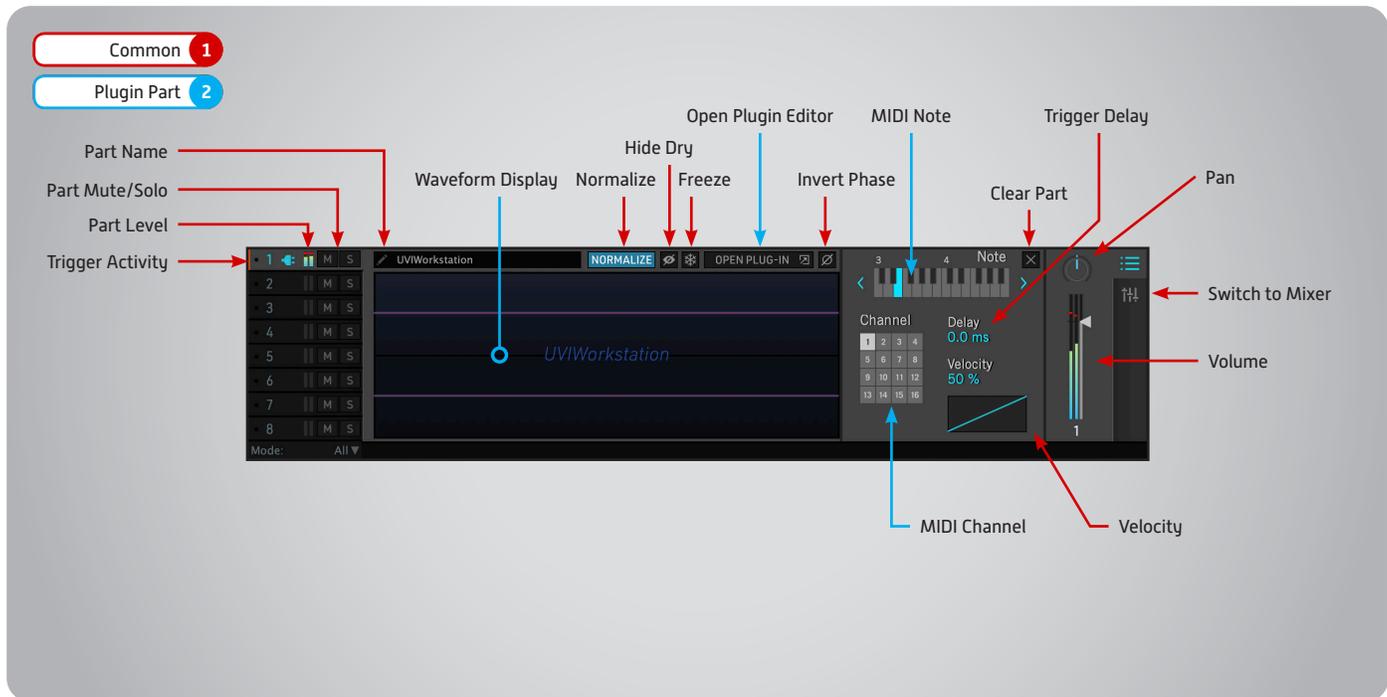

1 Common Part Controls

Parameters common all part types

- » **Trigger Activity**
Lights blink when the part is triggered
- » **Trigger Activity**
Lights blink when the part is triggered
Click here to trigger manually the sample/plugin
- » **Part Level**
Indicates the part output level
- » **Part Mute / Solo**
Click to mute or solo the part
- » **Part Name**
Display the part name
Click the pencil icon to rename the part
- » **Normalize**
Normalizes the display of the dry signal in the waveview (for easier matching)
- » **Hide Dry Level**
Click to hide the source level (red)
- » **Freeze**
Freeze the display of the dry signal in the waveview (for easier matching)
- » **Invert Phase [Ø]**
Click to invert the phase of the outputs


- » **Clear [X]**
Clear the part
- » **Pan**
Set the stereo pan position of the part
- » **Volume**
Set the output level of the part»
- » **Trigger Delay**
Offset the trigger timing positively, or negatively
- » **Velocity**
Percentage of part level to be dynamically controlled by trigger velocity
Velocity Curve: Response curve of trigger velocity (soft, linear, hard)

2 Plugin Part

Parameters specific to Plugin parts

- » **Open Plug-in**
Click to open the plugin editor
- » **Waveform Display**
Displays the Part (blue), and the Source (red), in realtime
- » **MIDI Note**
Set the note on the keyboard display
Click the cursor buttons left or right of the keyboard to shift the octave
- » **MIDI Channel**
Set the MIDI channel to send the trigger to the plugin


Interface - Mixer

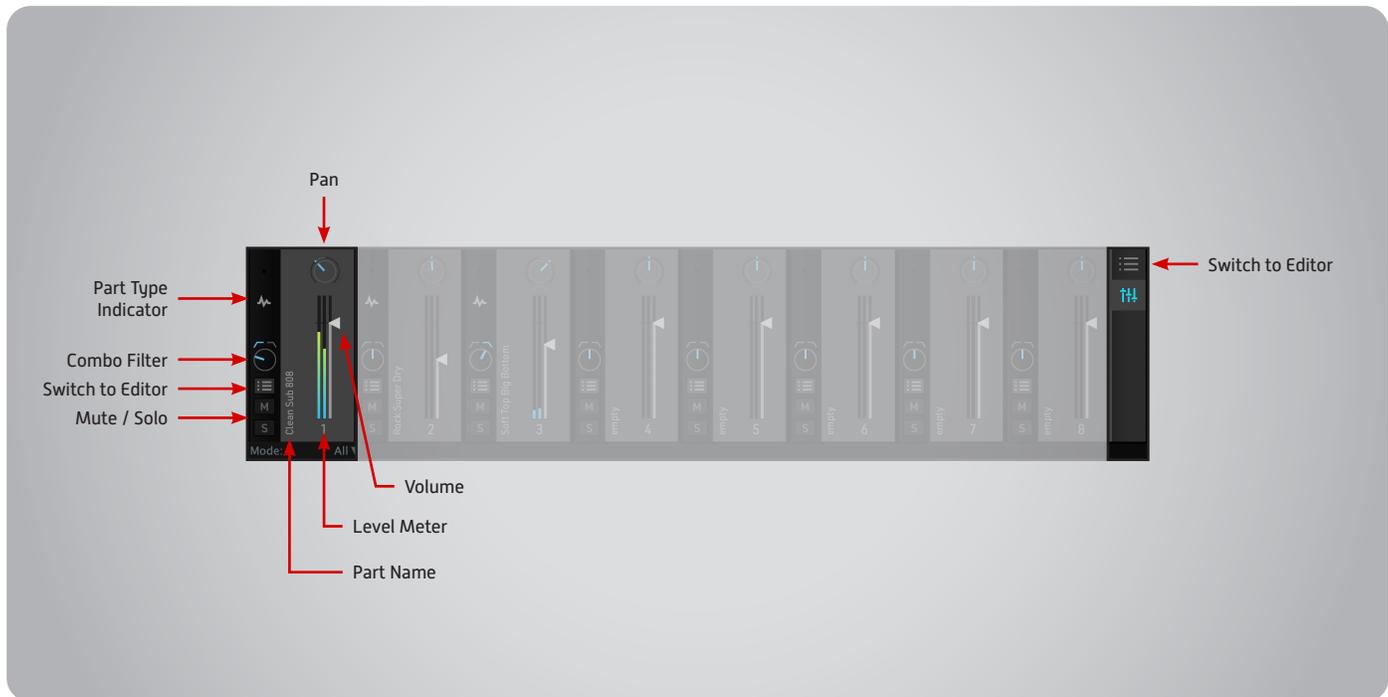

1 ► Part Mixer

- » **High and Low-Pass Combo Filter**
A one-knob combo filter, cut lows (left), or cut highs (right)
- » **Switch to Editor**
Switch to part Edit view
- » **Mute**
Click to mute the part
- » **Solo**
Click to Solo the part
- » **Pan**
Set the stereo pan position of the part
- » **Part Name**
Display the part name
- » **Volume**
Set the output level of the part
- » **Level Meter**
Indicates the part output level

Interface - MIDI Record

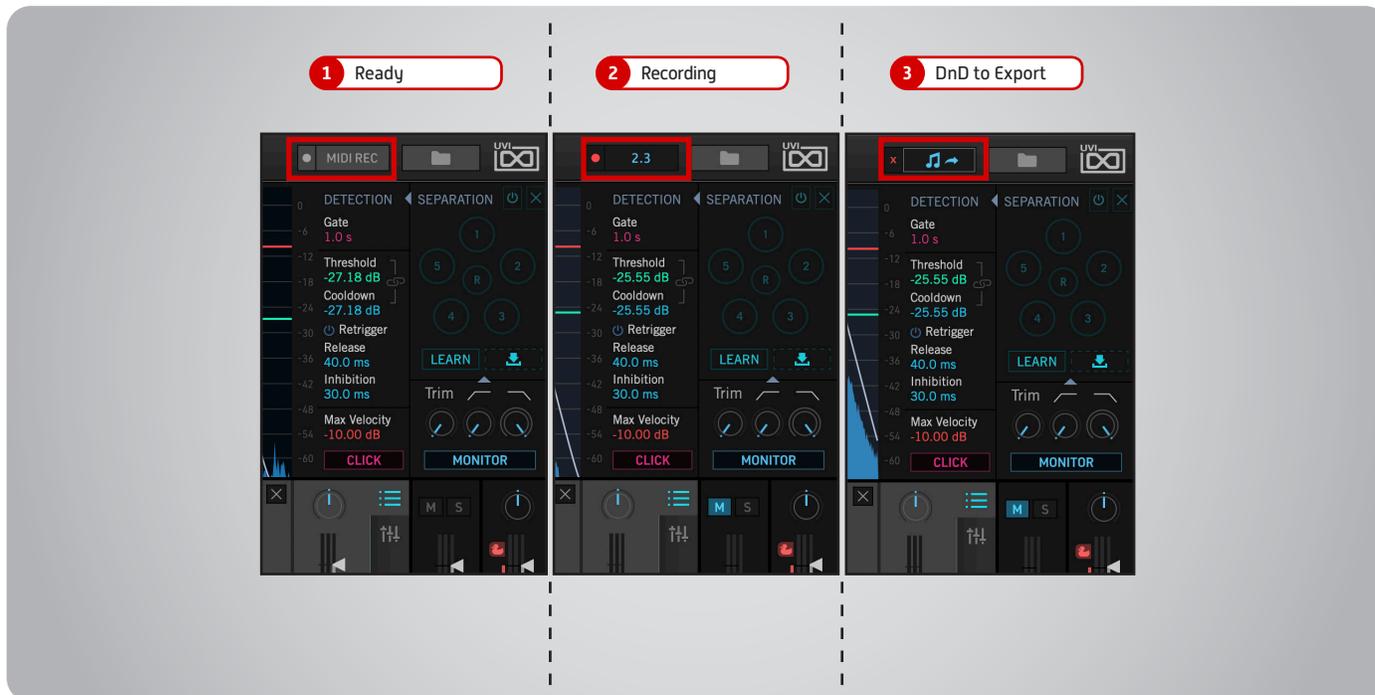

1 ▶ Ready

The default state

- Click to begin recording
- Right click the button to set the MIDI note and channel



The MIDI note and channel can be configured in the Settings section of Preferences panel

> See [Next Page](#) for detail

2 ▶ Recording

Recording in-progress


- Displays elapsed time
- Click to stop recording

3 ▶ DnD to Export

Recording complete, ready to export

- Drag-n-drop the button to a MIDI track in your DAW, or to your desktop
- Click [X] to delete the recording and reset

Interface - Preferences

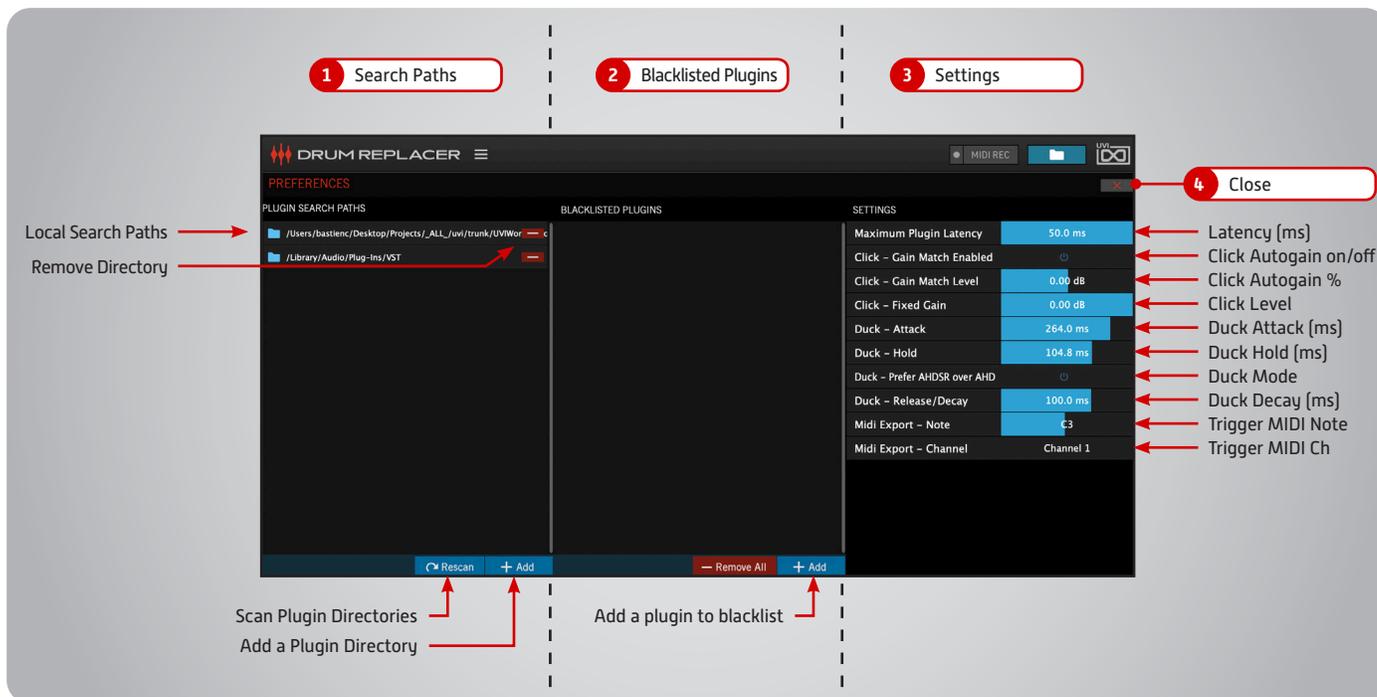

1 ► Plugin Search Paths

Local file paths where Drum Replacer should search for VSTi plugins

» Add Directory

Add new local plugin location

» Remove Directory (-)

Remove local plugin location

» Rescan All Directories

Scan all search paths for VSTi plugins

2 ► Blacklisted Plugins

A user-manageable list of plugins that should be omitted from the [Browser]

» Add

Add a plugin to the list

3 ► Settings

» Plugin - Latency (MS)

Lookahead time (up to 50ms)

Higher values allow for larger negative trigger delay settings at the cost of overall latency

» Click - Gain Match Enable

Activate dynamic [Click] volume

» Click - Gain Match Level

Set the percentage of [Click] volume to be dynamically set (based on incoming audio level)

» Duck - Attack

Set the attack time of dry output ducking

» Duck - Hold

Set the hold time of dry output ducking

» Duck - Prefer AHDSR over AHD

Switch ducking envelope mode between AHDSR or AHD ('Enabled' for AHDSR)

» Duck - Release/Decay

Set the release or decay time of dry output ducking

» MIDI Export - Note

Set the MIDI note for realtime output and MIDI recording

» MIDI Export - Channel

Set the MIDI channel for realtime output and MIDI recording

4 ► Close Button (X)

Click to close the panel and return to the main view

Links

UVI

- Home uvi.net/ 
- Effect Installation Guide. [installing_uvi_effects_en.pdf](#) 
- FAQ uvi.net/faq 
- Tutorial and Demo Videos youtube.com/ 
- Support uvi.net/contact-support 

iLok

- Home ilok.com/ 
- iLok License Manager ilok.com/ilm.html 
- FAQ ilok.com/supportfaq 



DRUM REPLACER

Credits and Thanks

Produced by UVI

Software

Bastien Commelongue
R my Muller
Olivier Tristan

GUI

Anthony Hak
Nathaniel Reeves

Preset Design

Louis Couka
Alain Etchart
R my Muller

Documents

R my Muller
Nathaniel Reeves
Kai Tomita



UVI.NET